
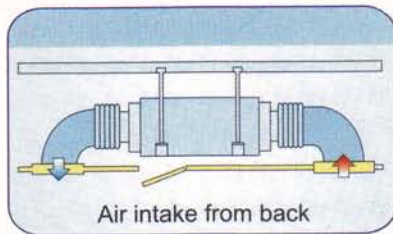
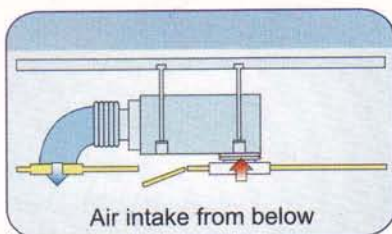


- MTT-18CR
- MTT-24CR
- MTT-36CR
- MTT-48CR
- MTT-60CR

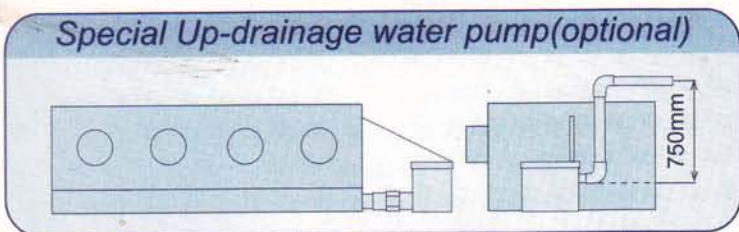

■ Cooling Only

Model		■ MTT-18CR	■ MTT-24CR	■ MTT-36CR	■ MTT-48CR	■ MTT-60CR
Capacity						
Cooling	Btu/h	18000	24000	36000	48000	60000
	W	5275	7034	10551	14068	17585
Electrical Data						
Power Supply	V-,Hz,Ph	220-240,50,1	←	380,50,3	←	←
Performance						
Air Flow Volume	m ³ /h	1160	1460	2070	2400	2800
External static pressure	Indoor Pa	40	←	70	←	100
Noise Level	dB(A)	35	←	38	40	46
Net Dimension & Weight						
Indoor unit	WxHxD mm	1000x298x800	←	1350x298x800	←	1350x320x800
Net Weight	Indoor kg	36	38	48	50	62
Packing Dimension & Gross Weight						
Indoor unit	WxHxD mm	1205x370x940	←	1555x370x940	←	1555x440x940
Gross Weight	Indoor kg	43	45	57	59	67
Qty per 20'/40'/40'HQ	Indoor Pieces	60/126/156	←	48/100/112	←	36/84/98
	Set Pieces	34/76/94	←	24/52/62	23/47/50	21/44/50

Remarks: 1.The above specifications are subject to change without prior notice for product improvement.

2.The noise levels given in the table reflect the levels in anechoic chamber.

